



Magic power inside

ABRASIVES
2018

SINO ABRASIVES LIMITED

Tel: 86-25-52613338

Fax: 86-25-52633220

Mob: 13813862664

Email: SALES@sinoabrasives.cn

www.sinoabrasives.cn

Office Add: 1-6# INDUSTRIAL PARK WUTAI SHAN CENTER, NANJING, CHINA

Manufacture Add: JINGYI ROAD, ECONOMIC AND DEVELOPMENT AREA, TAIZHOU, CHINA

Contents

| | |
|---|----|
| ABOUT US | 1 |
| WHY CHOSE US | 2 |
| CUTTING AND GRINDING DISCS For Iron - Steel | 3 |
| CUTTING AND GRINDING DISCS For Stainless Steel | 5 |
| CUTTING AND GRINDING DISCS For Aluminium-Cast Iron | 7 |
| CUTTING AND GRINDING DISCS For Marble-Stone | 8 |
| FLAP WHEELS--For Multi Use | 9 |
| FLAP WHEELS--For Stainless Steel | 10 |
| FLAP WHEELS--For Multi Use | 11 |
| SPINDLE MOUNTED FLAP WHEELS | 12 |
| NON-WOVEN SERIES | 13 |

ABOUT US

ABOUT US

Sino abrasives designs, develops, integrates and manufactures a complete range of cutting, grinding and polishing products for all kinds of customers. Including, Superhard materials– Diamond tools, CBN tools, T.C.T tools, Resin bonds abrasives, Sanding tools, Non-woven tools and so on. Sino Abrasives Limited was born in 2003. It' s initially just an abrasives tools factory. After a decade hard work, we had been a integrity manufacture, owned the full automatic abrasives production line, Superhard materials production line and Laser welded line.

We are always focus exclusively on the Creative and Service. We sincerely hope can supply the most appropriate service and products to you!



WHY CHOSE US

Raw material cost advantages:

Sino abrasives limited are cooperated with the best partners including international suppliers and domestic suppliers: 3M, NCA, BUFFALO, CUMI, SINOMACH, ZHONGNAN, ZZSM and so on.

After years cooperation, we have the advantage cost for the best quality raw materials.



WHY CHOSE US

Automatic Efficiency

Our production center covers an area of 14000 square meters. Full automatic machines are more than 70%. The abrasives capacity is more than 0.9 million pieces per month. Besides, the automatic machines can produce more precisely and more standardly. Benefits by it, we can easily keep the quality stable.

Advantage of Technical

Enterprise itself development, communication with raw materials suppliers, as well as the industry association conference, professional technical support of industrial institutions, we obtained the characteristic of technology accumulations.

Sino Abrasives Limited believes we have the ability to provide customized product service for each customer.

Quality supervise system

We firmly believe that management is the first productive force. Sino abrasives limited had been certificated by ISO 9001 at 2009. Meanwhile, we had built ourselves quality management system— Smart system. Advanced chemical analysis equipment, scientific quality control methods, strict management system had ensured we can do standardized regulation and information records for daily work: it starts from raw materials, to production, to the finished product testing and so on.

Logistics Advantages

The advantages of location greatly enhance the efficiency of customer visits to relevant industrial centers. Sino Abrasives Limited' s marketing and manufacture center is located in Taizhou city, central Jiangsu province. It is only two hours' drive from Shanghai, the international business center. It is only an hour's drive from Suzhou, the international cultural tourism center. It only takes an hour to reach the power tool base Nantong or Nanjing. It is only a 40-minute drive from Danyang, the center of the hardware base.

CUTTING AND GRINDING DISCS

For: IRON - STEEL

Flat centre cutting wheel



Main features

- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 76*1.0*10 | 3 1/5*0.04*1/4 | 41 | 25 | 0.8 |
| 76*1.8*10 | 3 1/5*5/64*1/4 | 41 | 25 | 0.9 |
| 105*1.0*16 | 4 *0.04*5/8 | 41 | 25 | 1.2 |
| 115*1.0*22.23 | 4 1/2*0.04*7/8 | 41 | 25 | 1.2 |
| 115*1.2*22.23 | 4 1/2*0.04*7/8 | 41 | 25 | 1.2 |
| 115*1.6*22.23 | 4 1/2*1/16*7/8 | 41 | 25 | 1.2 |
| 115*2.0*22.23 | 4 1/2*5/64*7/8 | 41 | 25 | 1.2 |
| 125*1.0*22.23 | 5*0.04*7/8 | 41 | 25 | 2.4 |
| 125*1.2*22.23 | 5*0.04*7/8 | 41 | 25 | 2.4 |
| 125*1.6*22.23 | 5*1/16*7/8 | 41 | 25 | 2.4 |
| 125*2.0*22.23 | 5*5/64*7/8 | 41 | 25 | 2.4 |
| 150*1.2*22.23 | 6*0.04*7/8 | 41 | 25 | 3.6 |
| 150*1.6*22.23 | 6*1/16*7/8 | 41 | 25 | 3.6 |
| 150*2.0*22.23 | 6*5/64*7/8 | 41 | 25 | 3.6 |
| 180*1.6*22.23 | 7*1/16*7/8 | 41 | 25 | 4.8 |
| 180*2.0*22.23 | 7*5/64*7/8 | 41 | 25 | 4.8 |
| 230*2.0*22.23 | 9*5/64*7/8 | 41 | 25 | 7.2 |

Depressed centre cutting wheel



Main features

- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 100*3.0*16 | 4 *1/8*5/8 | 42/41 | 25 | 1.4 |
| 115*2.5*22.23 | 4 1/2*5/64*7/8 | 42/41 | 25 | 2.0 |
| 115*3.0*22.23 | 4 1/2*1/8*7/8 | 42/41 | 25 | 2.2 |
| 125*2.5*22.23 | 5*5/64*7/8 | 42/41 | 25 | 2.1 |
| 125*3.0*22.23 | 5*1/8*7/8 | 42/41 | 25 | 2.3 |
| 150*3.0*22.23 | 6*1/8*7/8 | 42/41 | 25 | 3.8 |
| 180*3.2*22.23 | 7*1/8*7/8 | 42/41 | 25 | 4.8 |
| 230*2.5*22.23 | 9*5/64*7/8 | 42/41 | 25 | 8.0 |
| 230*3.2*22.23 | 9*1/8*7/8 | 42/41 | 25 | 8.2 |
| 230*3.5*22.23 | 9*1/8*7/8 | 42/41 | 25 | 8.4 |



CUTTING AND GRINDING DISCS

For: IRON - STEEL

Depressed centre Grinding wheel



Main features

- Versatility
- High stock removal
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 100*6.0*16 | 4 *1/4*5/8 | 27.0 | 10 | 1.4 |
| 115*6.0*22.23 | 4 1/2*9/32*7/8 | 27.0 | 10 | 1.7 |
| 125*6.0*22.23 | 5*9/32*7/8 | 27.0 | 10 | 1.7 |
| 150*6.0*22.23 | 6*9/32*7/8 | 27.0 | 10 | 3.8 |
| 180*6.4*22.23 | 7*9/32*7/8 | 27.0 | 10 | 4.5 |
| 180*7.0*22.23 | 7*9/32*7/8 | 27.0 | 10 | 4.5 |
| 230*6.4*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |
| 230*7.0*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |
| 230*8.0*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |

Flat centre cutting wheel



| DIMENSIONS | | SHAPE | | |
|-----------------|-------------|-------|----|------|
| [mm] | [inch] | | | |
| 230*3.2*30 | 9*1/8*7/8 | 41.0 | 25 | 7.2 |
| 305*3.5*30/25.4 | 12*9/64*7/8 | 41.0 | 25 | 12.5 |
| 350*3.8*40/25.4 | 14*9/64*7/8 | 41.0 | 25 | 14.5 |
| 400*4.0*40/25.4 | 18*5/32*7/8 | 41.0 | 25 | 17 |

Main features

- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality



CUTTING AND GRINDING DISCS For: STAINLESS STEEL

Flat centre cutting wheel



Main features

- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 76*1.0*10 | 3 1/5*0.04*1/4 | 41 | 25 | 0.8 |
| 76*1.8*10 | 3 1/5*5/64*1/4 | 41 | 25 | 0.9 |
| 105*1.0*16 | 4 *0.04*5/8 | 41 | 25 | 1.2 |
| 115*1.0*22.23 | 4 1/2*0.04*7/8 | 41 | 25 | 1.2 |
| 115*1.2*22.23 | 4 1/2*0.04*7/8 | 41 | 25 | 1.2 |
| 115*1.6*22.23 | 4 1/2*1/16*7/8 | 41 | 25 | 1.2 |
| 115*2.0*22.23 | 4 1/2*5/64*7/8 | 41 | 25 | 1.2 |
| 125*1.0*22.23 | 5*0.04*7/8 | 41 | 25 | 2.4 |
| 125*1.2*22.23 | 5*0.04*7/8 | 41 | 25 | 2.4 |
| 125*1.6*22.23 | 5*1/16*7/8 | 41 | 25 | 2.4 |
| 125*2.0*22.23 | 5*5/64*7/8 | 41 | 25 | 2.4 |
| 150*1.2*22.23 | 6*0.04*7/8 | 41 | 25 | 3.6 |
| 150*1.6*22.23 | 6*1/16*7/8 | 41 | 25 | 3.6 |
| 150*2.0*22.23 | 6*5/64*7/8 | 41 | 25 | 3.6 |
| 180*1.6*22.23 | 7*1/16*7/8 | 41 | 25 | 4.8 |
| 180*2.0*22.23 | 7*5/64*7/8 | 41 | 25 | 4.8 |
| 230*2.0*22.23 | 9*5/64*7/8 | 41 | 25 | 7.2 |

Depressed centre cutting wheel



Main features

- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 100*3.0*16 | 4 *1/8*5/8 | 42/41 | 25 | 1.4 |
| 115*2.5*22.23 | 4 1/2*5/64*7/8 | 42/41 | 25 | 2.0 |
| 115*3.0*22.23 | 4 1/2*1/8*7/8 | 42/41 | 25 | 2.2 |
| 125*2.5*22.23 | 5*5/64*7/8 | 42/41 | 25 | 2.1 |
| 125*3.0*22.23 | 5*1/8*7/8 | 42/41 | 25 | 2.3 |
| 150*3.0*22.23 | 6*1/8*7/8 | 42/41 | 25 | 3.8 |
| 180*3.2*22.23 | 7*1/8*7/8 | 42/41 | 25 | 4.8 |
| 230*2.5*22.23 | 9*5/64*7/8 | 42/41 | 25 | 8.0 |
| 230*3.2*22.23 | 9*1/8*7/8 | 42/41 | 25 | 8.2 |
| 230*3.5*22.23 | 9*1/8*7/8 | 42/41 | 25 | 8.4 |



CUTTING AND GRINDING DISCS For: STAINLESS STEEL

Depressed centre Grinding wheel



Main features

- Versatility
- High stock removal
- Comfort of use
- Long life
- Great quality



| DIMENSIONS | | SHAPE | | |
|---------------|----------------|-------|----|-----|
| [mm] | [inch] | | | |
| 100*6.0*16 | 4 *1/4*5/8 | 27.0 | 10 | 1.4 |
| 115*6.0*22.23 | 4 1/2*9/32*7/8 | 27.0 | 10 | 1.7 |
| 125*6.0*22.23 | 5*9/32*7/8 | 27.0 | 10 | 1.7 |
| 150*6.0*22.23 | 6*9/32*7/8 | 27.0 | 10 | 3.8 |
| 180*6.4*22.23 | 7*9/32*7/8 | 27.0 | 10 | 4.5 |
| 180*7.0*22.23 | 7*9/32*7/8 | 27.0 | 10 | 4.5 |
| 230*6.4*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |
| 230*7.0*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |
| 230*8.0*22.23 | 9*9/32*7/8 | 27.0 | 10 | 8 |

Flat centre cutting wheel






| DIMENSIONS | | SHAPE | | |
|-----------------|-------------|-------|----|------|
| [mm] | [inch] | | | |
| 230*3.2*30 | 9*1/8*7/8 | 41.0 | 25 | 7.2 |
| 305*3.5*30/25.4 | 12*9/64*7/8 | 41.0 | 25 | 12.5 |
| 350*3.8*40/25.4 | 14*9/64*7/8 | 41.0 | 25 | 14.5 |
| 400*4.0*40/25.4 | 18*5/32*7/8 | 41.0 | 25 | 17 |




Main features




- Versatility
- Clean cut
- Comfort of use
- Long life
- Great quality






CUTTING AND GRINDING DISCS For: Aluminium-Cast iron

| Depressed centre cutting wheel | | | | | |
|---|---------------|---------------|------------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | | 100*3.0*16 | 4 *1/8*5/8 | 42/41 | 25 |
| | 115*3.0*22.23 | 4 1/2*1/8*7/8 | 42/41 | 25 | 1.2 |
| | 125*3.0*22.23 | 5*1/8*7/8 | 42/41 | 25 | 2.4 |
| | 150*3.0*22.23 | 6*1/8*7/8 | 42/41 | 25 | 3.6 |
| | 180*3.2*22.23 | 7*1/8*7/8 | 42/41 | 25 | 4.8 |
| | 230*3.2*22.23 | 9*1/8*7/8 | 42/41 | 25 | 7.2 |




| Flat centre cutting wheel | | | | | |
|---|---------------|---------------|---------------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | | 115*1.6*22.23 | 4 1/2*1/8*7/8 | 41 | 25 |
| | 125*1.6*22.23 | 5*1/8*7/8 | 41 | 25 | 2.4 |
| | 230*2.0*22.23 | 9*1/8*7/8 | 41 | 25 | 7.2 |




| Depressed centre grinding wheel | | | | | |
|--|---------------|----------------|------------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | | 100*5.0*16 | 4 *1/4*5/8 | 27 | 10 |
| | 115*6.0*22.23 | 4 1/2*9/32*7/8 | 27 | 10 | 1.7 |
| | 125*6.0*22.23 | 5*9/32*7/8 | 27 | 10 | 2 |
| | 150*6.0*22.23 | 7*9/32*7/8 | 27 | 10 | 3.6 |
| | 180*7.0*22.23 | 7*9/32*7/8 | 27 | 10 | 4.5 |
| | 230*7.0*22.23 | 9*9/32*7/8 | 27 | 10 | 8 |




| Flat centre cutting wheel for fix machines | | | | | |
|---|-----------------------|-------------|-----------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | | 230*3.2*30 | 9*1/8*7/8 | 41 | 25 |
| | 305*3.5*30/25.4/22.23 | 12*9/64*7/8 | 41 | 25 | 12.5 |
| | 350*3.8*40/25.4 | 14*9/64*7/8 | 41 | 25 | 14.5 |
| | 400*4.0*40/25.4 | 18*5/32*7/8 | 41 | 25 | 17 |




CUTTING AND GRINDING DISCS

For: Marble-Stone

| Flat centre cutting wheel | | | | | |
|---|---------------|---------------|-------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | 115*1.6*22.23 | 4 1/2*1/8*7/8 | | | |
| 125*1.6*22.23 | 5*1/8*7/8 | 42/41 | 25 | 2.4 | |
| 230*2.0*22.23 | 9*1/8*7/8 | 42/41 | 25 | 7.2 | |
| 100*3.0*16 | 4 *1/8*5/8 | 42/41 | 25 | 1.0 | |
| 115*3.0*22.23 | 4 1/2*1/8*7/8 | 42/41 | 25 | 1.2 | |
| 125*3.0*22.23 | 5*1/8*7/8 | 42/41 | 25 | 2.4 | |
| 150*3.0*22.23 | 6*1/8*7/8 | 42/41 | 25 | 3.6 | |
| 180*3.2*22.23 | 7*1/8*7/8 | 42/41 | 25 | 4.8 | |
| 230*3.2*22.23 | 9*1/8*7/8 | 42/41 | 25 | 7.2 | |

| Depressed centre grinding wheel | | | | | |
|---|----------------|------------|-------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | 100*6.0*16 | 4 *1/4*5/8 | | | |
| 115*6.0*22.23 | 4 1/2*9/32*7/8 | 27 | 10 | 1.7 | |
| 125*6.0*22.23 | 5*9/32*7/8 | 27 | 10 | 2 | |
| 150*6.0*22.23 | 7*9/32*7/8 | 27 | 10 | 3.6 | |
| 180*7.0*22.23 | 7*9/32*7/8 | 27 | 10 | 4.5 | |
| 230*7.0*22.23 | 9*9/32*7/8 | 27 | 10 | 8.0 | |

| Flat centre cutting wheel for fix machines | | | | | |
|--|-------------|-----------|-------|--|--|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | 230*3.2*30 | 9*1/8*7/8 | | | |
| 305*3.8*30/25.4/22.23 | 12*9/64*7/8 | 41 | 25 | 12.5 | |
| 350*3.8*40/25.4 | 14*9/64*7/8 | 41 | 25 | 14.5 | |
| 400*4.0*40/25.4 | 18*5/32*7/8 | 41 | 25 | 17.0 | |

| Depressed centre Grinding Flexible wheel | | | | | |
|---|------------|--------|-------|---|---|
|  | DIMENSIONS | | SHAPE |  |  |
| | [mm] | [inch] | | | |
| | 100*2.0*16 | 4 | | | |
| 100*2.0*16 | 4 | 27 | 50 | 2.6 | |

FLAP WHEELS--For Multi Use

Ceramic X Series For Multi Use

Main Features

Reinforced nylon and fiberglass backing Super Ceramic cloth

| DIAMETER [Dxh] | | BACKING | GRIT | ☹ | 🔒 |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |




Super Ceramic for Titanium alloy

Main Features

Reinforced nylon and fiberglass backing Super Ceramic cloth

| DIAMETER [Dxh] | | BACKING | GRIT | ☹ | 🔒 |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |

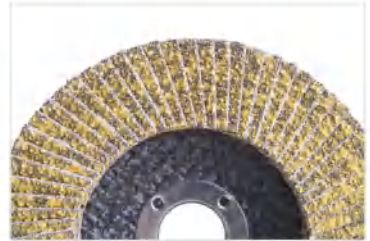

Heavy Duty

Main Features

Reinforced nylon and fiberglass backing;

Super longer life for Surface finishing

| DIAMETER [Dxh] | | BACKING | GRIT | ☹ | 🔒 |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 180x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |



FLAP WHEELS--For Stainless Steel

Trizact Material

Main Features

Continuously Polishing while expose fresh abrasive cutting surfaces
More predictable; Higher worker productivity; More consistent quality

| DIAMETER (Deb) | | BACKING | GRIT | ♻️ | ♻️ |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |



Zirconium Cloth For Stainless Steel

Main Features

Reinforced nylon and fiberglass backing
Zirconium cloth Full contact of the flaps

| DIAMETER (Deb) | | BACKING | GRIT | ♻️ | ♻️ |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |




Felt Wheel

Main Features

100% Naaural Wool Super thin Wool High flexibility No noise

| DIAMETER (Deb) | | BACKING | GRIT | ♻️ | ♻️ |
|----------------|-----------|------------|----------|----|-----|
| [mm] | [inch] | | | | |
| 115x22.23 | 4 1/2x7/8 | Flat fibre | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Flat fibre | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Flat fibre | 40 60 80 | 10 | 2.6 |
| 115x22.23 | 4 1/2x7/8 | Plastic | 40 60 80 | 10 | 1 |
| 125x22.23 | 5x7/8 | Plastic | 40 60 80 | 10 | 1.1 |
| 160x22.23 | 7x7/8 | Plastic | 40 60 80 | 10 | 2.6 |

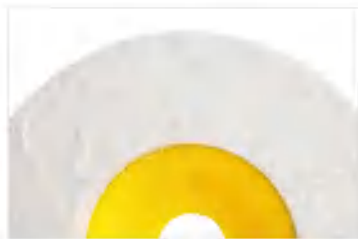

FLAP WHEELS--For Multi Use

Flap Wheel Abrasives mixed Non-woven Cloth

Main Features

Polishing-finishing of cross scratches

A full range of grits and dimensions,

enabling to get all kind of surface finish

| DIAMETER (Dbb) | | BACKING | GRIT | | | PACKAGE |
|----------------|-----------|------------|------|----|----|---------|
| [mm] | [inch] | | | | | |
| 115*22.23 | 4 1/2*7/8 | Flat fibre | 40 | 60 | 80 | 10 |
| 125*22.23 | 5*7/8 | Flat fibre | 40 | 60 | 80 | 10 |
| 180*22.23 | 7*7/8 | Flat fibre | 40 | 60 | 80 | 10 |
| 115*22.23 | 4 1/2*7/8 | Plastic | 40 | 60 | 80 | 10 |
| 125*22.23 | 5*7/8 | Plastic | 40 | 60 | 80 | 10 |
| 180*22.23 | 7*7/8 | Plastic | 40 | 60 | 80 | 10 |



Flap Wheel Aluminium Oxide Cloth

Main Features

Flexible Aluminium oxide cloth on metal flanges

Polishing-finishing of cross scratches

A full range of grits and dimensions,

Enabling to get all kind of surface finish

| DIMENSIONS [Dbb*H*Flange] [mm] | PACKAGE | GRIT | | | | |
|--------------------------------------|---------|------|----|----|----|-----|
| | | 40 | 50 | 60 | 80 | 100 |
| 100*50*25 | 10 | 40 | 50 | 60 | 80 | 100 |
| 100*50*25 | 10 | 40 | 50 | 60 | 80 | 100 |
| 150*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 150*50*54 | 10 | 40 | 50 | 60 | 80 | 100 |
| 150*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 150*50*54 | 10 | 40 | 50 | 60 | 80 | 100 |
| 165*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 165*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 165*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 165*50*25.4 | 10 | 40 | 50 | 60 | 80 | 100 |
| 165*50*54 | 10 | 40 | 50 | 60 | 80 | 100 |
| 200*30*54 | 10 | 40 | 50 | 60 | 80 | 100 |
| 200*50*54 | 10 | 40 | 50 | 60 | 80 | 100 |
| 250*25*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 250*30*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 250*50*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*25*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*30*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*40*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*50*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*75*100 | 10 | 40 | 50 | 60 | 80 | 100 |
| 300*100*100 | 10 | 40 | 50 | 60 | 80 | 100 |



SPINDLE MOUNTED FLAP WHEELS

SPINDLE MOUNTED FALP WHEELS ALUMINIUM OXIDE CLOTH

Flexible Aluminium oxide cloth on metal I flanges
 Polishing-finishing of cross scratches
 A full range of grits and dimensions,
 Enabling to get all king of surface finish



| DIMENSIONS [DxHxShank] | PACKAGE | GRIT | | | | | | |
|---------------------------|---------|------|----|----|-----|-----|-----|-----|
| | | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 22x10x3 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 22x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 22x15x3 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 22x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 22x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 25x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 25x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 25x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 25x25x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x10x3 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x15x3 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 30x30x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x25x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 40x30x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 50x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 50x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 50x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 50x25x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 50x30x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 60x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 60x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 60x30x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 60x40x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 60x50x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x10x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x15x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x20x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x30x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x40x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |
| 80x50x6 | 25 | 40 | 60 | 80 | 120 | 180 | 240 | 320 |

NON-WOVEN SERIES

Non-woven polishing wheel

Blending and finishing applications common in the metal fabrication, welding and polishing industries . flap wheels are conformable to intricate shapes and contours . Designed to deliver a consistent finish with a uniform rate of cut, flap wheels wear away continually exposing fresh abrasives .

Applications:

Used for a wide range of metal fabrication welding applications including; blending, deburring, cleaning, finishing, and polishing

Size Range:

Flap wheels with mounted steel shanks: 2" – 3" diameter

Flap wheels with arbor holes: 3" – 12" diameter

Grit Range: 50 – 320

Abrasive Grain: Aluminum Oxide, Silicon Carbide



Floor Cleaning Pad

Size: 14" 17" 19" 24" 27"

Colour: White Blue Red Black Brown

Strips even the most severe floors
Auto Scrub quickly and effectively.
Removes tough finishes and extreme wax build up.
Provides uniform finish removal in wet stripping applications.



QUICK CHANGE DISC

Discs lock to standard back-up pads with a unique nut design and are easily removed, increasing your productivity with more time to grind .

Applications: Medium-to-light material removal, deburring, blending, cleaning, finishing and polishing
Size Range: 4-1/2" - 7" / 7/8"

Grit Range Coarse, Medium, Fine, Very Fine

Abrasives Grain: Ceramic Alumina, Silicon Carbide, Aluminum Oxide

Back-up Pad: Rubber and Plastic





LA COMPAÑIA

La fábrica está situada en Jiangsu de China, fue fundada el 2003. Sinoabrasives siempre se compromete en proporcionar y ofrecer abrasivos con un servicio excelente. Esperamos que la empresa continúe con el desarrollo de nuestros productos durante los próximos años. Hemos suministrado abrasivos durante muchos años a distribuidores de abrasivos y a clientes directos, y estamos orgullosos de nuestra relaciones con el servicio ofrecido. Sinoabrasives queda atender los abrasivos que se necesitan en casi cualquier Mercado; ofrecemos el máximo rendimiento para usted. Buscamos contribuir en su éxito económico sostenible y en el beneficio mutuo.

SINO ABRASIVES